

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015013 A1

(51) International Patent Classification: **F03D 11/04**

(21) International Application Number:
PCT/EP2003/008871

(22) International Filing Date: 9 August 2003 (09.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **GENERAL ELECTRIC COMPANY** [US/US]; 1 River Road, Schenectady, NY 12345 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SEIDEL, Marc** [DE/DE]; Sophienstrasse 2, 48429 Rheine (DE).

(74) Agents: **HILLERINGMANN, Jochen et al.**; Bahnhofsvorplatz 1 (Deichmannhaus), 50667 Cologne (DE).

(81) Designated States (national): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TOWER FOUNDATION, IN PARTICULAR FOR A WIND ENERGY TURBINE

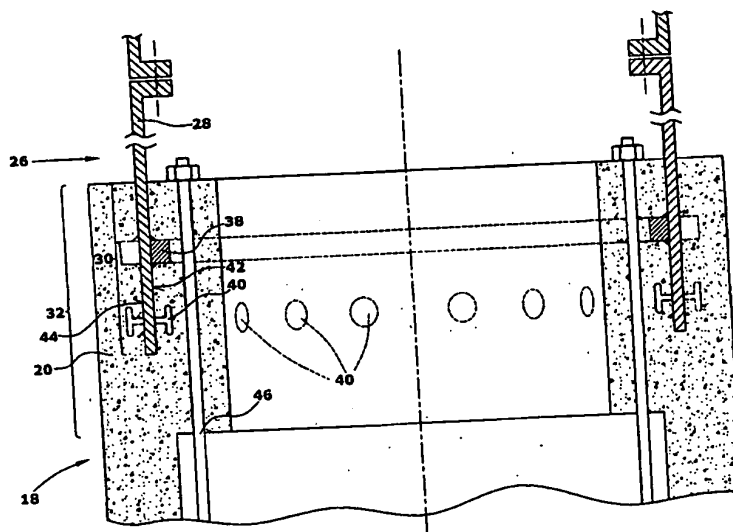

(57) Abstract: A tower, in particular for a wind energy turbine, comprises a first tower segment (18) having a wall (20) comprising concrete material and a second tower segment (26) having a wall (28) comprising steel. The wall (28) of the second tower segment (26) comprises an end portion (30) embedded in an embedment portion (32) of the wall (20) of the first tower segment (18). The second tower segment (26) within its embedded end portion (30) comprises at least one anchoring element (38, 40, 52) projecting radially from an inner or an outer surface (42, 44) or both inner and outer surfaces (42, 44) of the wall (28) of the second tower segment (26), the anchoring elements (38, 40, 52) being arranged along an axial direction of the second tower segment (26).

WO 2005/015013 A1